

## EZ-660BAT Installation Guide

---


The installation of the EZ-660BAT can have a major impact on the device performance. Care should be given to physical placement of the device on the unpowered asset. It is designed to report 2x per day and it is important to follow the instructions in regards to its reporting activation.

### Plan the installation:

The EZ-660BAT is a self-contained Battery powered unit. The cell and GPS antennas are located on the TOP portion of the unit (see image below). It is critical that this area is facing up towards the sky for optimum performance. The unit is weather/waterproof so it can be placed outside of the non-powered asset. As with all GPS devices, they need a clear eye to the sky. They work well when concealed if there is zero metal between the unit and the sky.

### Mounting the EZ-660-BAT on/in the Equipment/Asset:

The EZ-660BAT has 4 mounting holes and is designed to be screwed or bolted to the asset. It can be painted to match the asset, with a paint that is designed for plastic. As mentioned above, it can be mounted inside the asset only if there is NO METAL between it and the sky.

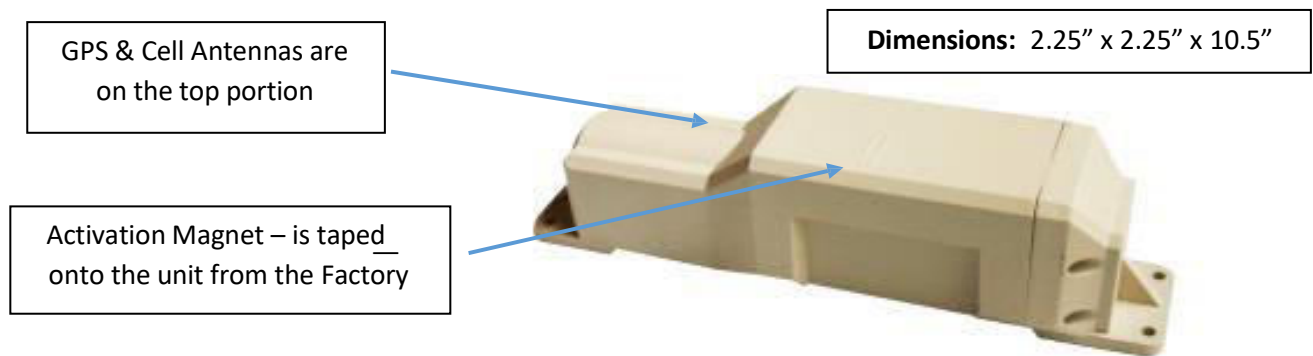

### Activating the EZ-660BAT:

The EZ-660BAT – arrives from the factory with a small magnet that is taped on the TOP of the unit (see image above). To activate the unit, remove the MAGNET at the exact TIME that the customer wants the EZ-660BAT to report in. The unit reports in 2x per day (every 12 hours).

- Example: if you remove the magnet at 7AM, it will report at 7AM and 7 PM each day.

So please discuss with customer prior to removing magnet, so the EZ-660BAT reports in at the customer's desired time.

- **Note: Once the MAGNET is removed – that starts the 1<sup>st</sup> report at that exact time. This report time interval CANNOT be changed after it is activated.**